



RAPIDMAX® *eco*

MAXimum Performance, **MAX**imum Durability, **MAX**imum Efficiency

The Australian designed and manufactured **RAPIDMAX® *eco*** high speed door is a tough workhorse providing solid steel frame construction coupled with high speed – whisper quiet operation and efficient perimeter sealing to reduce energy consumption and improve environmental control.

AUSTRALIAN MADE
AUSTRALIAN DESIGNED
GERMAN DRIVE TECHNOLOGY



MAX Doors **TOUGHFLEX®** door curtain



Compact Guide Design



240v Single Phase GfA Safedrive




Durable solid steel construction

Technical Datasheet – **RAPIDMAX® eco**

Application	Internal	
Dimension	Max width	4000mm
	Max height	4000mm
Opening Speed	Up to	1.6m/sec
Top Roll Tube	Galvanised Steel	Standard
Door Curtain	TOUGHFLEX® with No Vision Panel	Standard
	TOUGHFLEX® with Full Vision Panel	Optional
Door Frame	Galvanised Steel	Standard
	Powdercoated	Optional
Fascia	Powdercoated	Optional
Windlok System		Optional
Drive System	GfA Safedrive® IP65 – 240V Single Phase	Standard
Control System	GFA TS971 Logic Control IP54	Standard
	GFA TS971-XL Logic Control IP65	Optional
Crash System	Knockout with manual reset	Optional
Safety	Bottom Beam Safety Edge > Pneumatic	Standard
	>Optical	Optional
	Light Curtain (1800mm active height)	Optional
	Safedrive® integrated safety brake	Standard
	Door-line PE Beam	Standard
	Emergency Stop Button	Standard
	Manual Crank Handle Over-ride	Standard
	Manual Chain Over-ride	Optional
Wind Load Rating	Gusts > 30km/hr	Standard
	Gusts > 72km/hr, Class 1 (max door size 12m²)	Optional

RAPIDMAX® Clearances

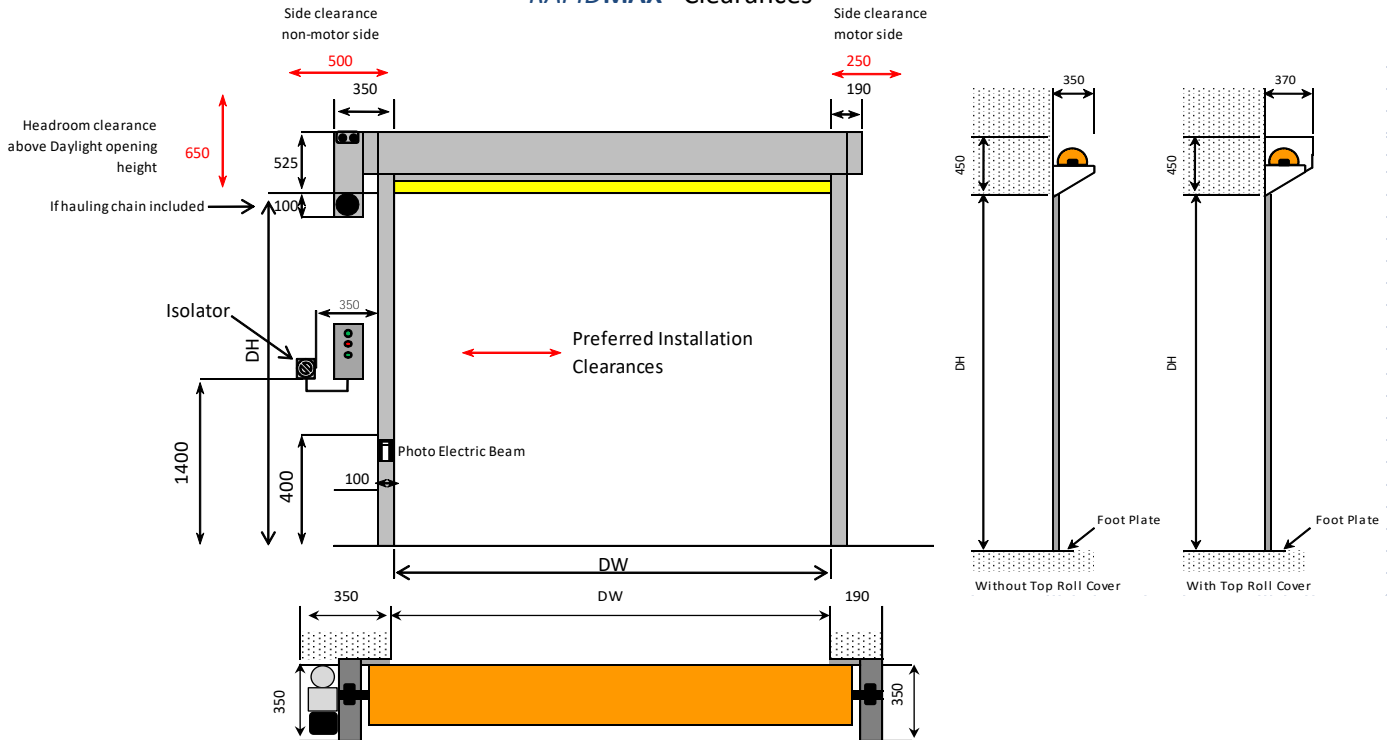

MAX Door Solutions Pty. Ltd.

P: 1300 793 378

sales@maxdoors.com.au

56 Export Drive, Molendinar, QLD 4214
 PO Box 777, Biggera Waters, QLD, 4216

www.maxdoors.com.au